# 65" (64.5" viewable) Professional-grade LED Large Format Display

## Large Full HD Screen for Hospitality and Pro/AV Environments

**CDE6500-L**



The ViewSonic® CDE6500-L is a 65" (64.5" viewable) professional-grade LED large format display that provides high-impact messaging in hotels, restaurants, and other businesses. The built-in media player supports USB playback of photos and music, as well as direct content cloning with hospitality mode—this provides an easy and efficient way for loading content onto multiple displays. This display features Full HD resolution, SuperClear® wide-angle viewing technology, 350-nit brightness, 5000:1 native contrast ratio, and dual integrated 10W speakers to deliver crystal-clear multimedia content to targeted audiences. Versatile connectivity options include HDMI (x3), VGA, Composite, YPbPr, RS232, and SPDIF interface for easy installation and control of a variety of high-definition devices. It also supports RS232 with IR pass-through and HDMI CEC pass-through, providing easy management and control of multiple-display installations with connected HD set-top boxes, media players, and Blu-ray™ players.

### Full HD 1080p for Superior Pixel Performance

Full HD 1920x1080 resolution delivers superior pixel-by-pixel performance for a more realistic viewing experience. At this resolution, greater image clarity and detail brings high-definition multimedia content to life.

### Handy USB Multimedia Playback & Cloning

With the handy PC-less USB playback feature, photos and music can be immediately played and shared by plugging a USB drive into the display. In addition, the CDE6500-L includes USB cloning for easy duplication in multi-screen environments.

### Hospitality Mode for Automated Multi-screen Control

The CDE6500-L is great for multi-screen setups in hotels, restaurants, sports bars, or retail outlets that require automated control and customizable presets. With a USB-programmable hospitality setting, each television will have the same customized channel default, audio level, front-panel lockout, and auto power-up settings.

# 65" (64.5" viewable) Professional-grade LED Large Format Display

## RS232 with IR Pass-through for Multi-device Control

The CDE6500-L's RS232 control port features IR pass-through to provide automated control for hospitality and commercial display installations. IR pass-through offers local control for set-top boxes or other connected devices, directly with the display's remote controller.

## SuperClear Technology Improves IPS Panels for Better Wide-angle Viewing

Our SuperClear technology enhances IPS image quality for a better wide-angle viewing experience. With 176/176-degree vertical and horizontal viewing angles, your audience will experience accurate, vivid colors and consistent brightness levels whether looking at the screen from above, below, the front, or the side.

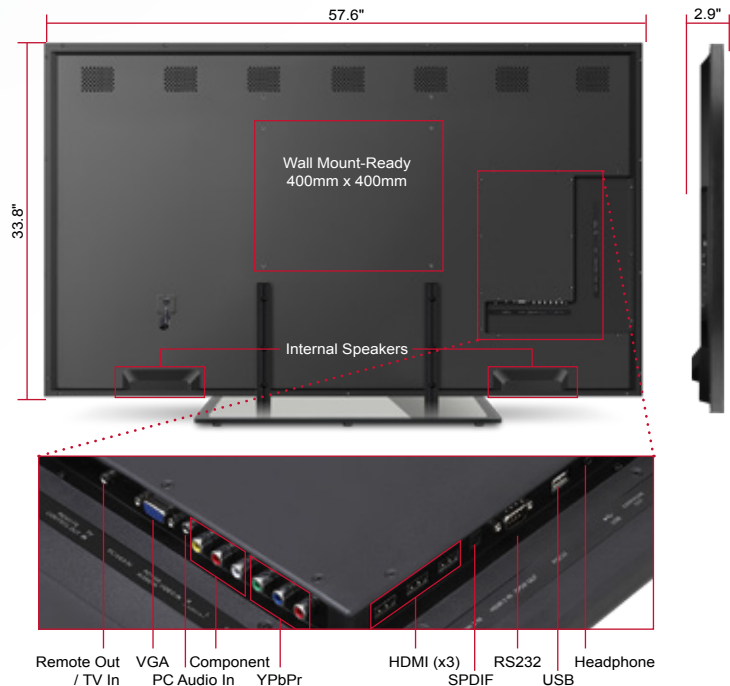## Versatile Inputs and One-time Configuration Settings

With a versatile selection of inputs, including HDMI (x3), CVBS, YPbPr and VGA, the CDE6500-L commercial display enables you to easily connect and use a variety of digital equipment. Best of all, the one-time display installation and setup feature means your preferred source settings are never lost.



57.6"  2.9"  33.8"

Wall Mount-Ready 400mm x 400mm

Internal Speakers

Remote Out / TV In | VGA PC Audio In | Component YPbPr | HDMI (x3) SPDIF | RS232 USB | Headphone

## Applications

- Indoor commercial display environments
- Retail digital signage – small to mid-size business
- Hotels, restaurants, bars, and hospitality environments
- Schools and Universities

15 mm
15 mm

Bezel Width

### Optional Accessories (sold separately)

Wall Mount Kit .......................................................WMK-014

## Specifications

| PANEL | | |
|---|---|---|
| | Type | 65.0" color TFT LCD Module with LED Backlight |
| | Display Area | 56.2" horizontal x 31.6" vertical; 64.5" diagonal |
| | Optimum Resolution | 1920x1080 |
| | Contrast Ratio | 5000:1 (typ) |
| | Viewing Angles | 176° horizontal, 176° vertical |
| | Response Time | 6.5ms |
| | Light Source | Long life, 50,000 hrs. (typ) |
| | Brightness | 350 cd/m² |
| | Aspect Ratio | 16:9 |
| | Panel Surface | Anti-glare coating |

| INPUT | | |
|---|---|---|
| | Video Input | HDMI, component, VGA, CVBS |
| | Video Output | VGA, CVBS |
| | Control Input | RS232, USB |

| AUDIO OUTPUT | | |
|---|---|---|
| | Speakers | Internal 10-watt (x2) |

| INPUT SIGNAL | | |
|---|---|---|
| | TV/Video Comp | 480i, 480p, 720p, 1080i, 1080p |

| CONNECTOR | | |
|---|---|---|
| | Analog | 15-pin mini D-sub (VGA), RCA Audio In, headphone out |
| | Digital | HDMI (x3), DVI, YPbPr, CVBS, SPDIF, USB |
| | Power | Power cord |

| CONTROLS | | |
|---|---|---|
| | Basic | Power, Mute, Input, Vol+, Vol-, Up, Down, Menu |
| | Picture | Picture Settings, Picture Mode, Screen Size, PC Settings, Color Temperature, Backlight, Advanced Picture Settings |
| | Sound | Sound settings, Analog Sound, Digital Sound, Digital Audio Output, Equalizer Setting |
| | Parental | Lock Parent Control, V-CHIP, Change Password, Keypad Lock, Source Lock, System Lock |
| | Setup | Closed Caption, Menu Language, Clock, OSD Transparency, OSD Timer |
| | Others | Blue Back, No Signal Power Off, No Operation Power Off, User Monitor, Audio Only, TV ID, All Reset (See user guide for complete OSD functionality) |

| POWER | | |
|---|---|---|
| | Voltage | AC 100-240V (universal), 50-60Hz |
| | Consumption | 160W (typ) |

| OPERATING CONDITIONS | | |
|---|---|---|
| | Temperature | 32-104ºF (0–40ºC) |
| | Humidity | 20-80% (non-condensing) |

| DIMENSIONS (W x H x D) | | |
|---|---|---|
| | Physical (w/ Stand) | 57.6 x 37.1 x 11.0 in. / 1462.8 x 942.4 x 280 mm |
| | Physical (w/o Stand) | 57.6 x 33.8 x 2.9 in. / 1462.8 x 857.1 x 74.3 mm |
| | Packaging | 60.7 x 39.4 x 8.9 in. / 1540 x 1000 x 225 mm |

| BEZEL DIMENSIONS | | |
|---|---|---|
| | Left/Right | 15mm / 15mm |
| | Top/Bottom | 15mm / 34.5mm |

| WEIGHT | | |
|---|---|---|
| | Net (w/ Stand) | 92.3 lbs / 42.0 kg |
| | Net (w/o Stand) | 82.0 lbs / 37.2 kg |
| | Gross | 125.6 lbs / 57.0 kg |

| WALL MOUNT | | |
|---|---|---|
| | VESA® | 400 x 400 mm |

| REGULATIONS | FCC, CE, CB, UL (by request), RoHS, Mexico-UL CoC |
|---|---|

| RECYCLE/DISPOSAL | Please dispose of in accordance with local, state, or federal laws |
|---|---|

| WARRANTY | Three-year limited warranty on parts and labor |
|---|---|

RoHS COMPLIANT™

1080p Full HD

ViewSonic Corporation's QMS & EMS have been registered to ISO 9001 & ISO 14001, respectively, by TUV NORD.

## What's in the box?

CDE6500-L display, power cable, VGA cable, remote control with batteries, Quick Start Guide, ViewSonic Wizard CD (User Guide)

www.viewsonic.com